

The Quintel MultiServ Quadband 8 Port Antenna with patented QTilt™ technology uniquely delivers four independent services in a single slim-line antenna. This enables existing antenna-constrained network sites to be upgraded to add new services such as LTE in both 700 & AWS bands with the replacement of one antenna.

The Quintel MultiServ Quadband 8 Port Antenna is an ideal solution for independently optimizing multiple services when rapidly introducing new services. Technology agnostic, each band provides flexibility for existing and future technologies such as GSM, CDMA, UMTS, LTE and advanced MIMO implementations.

The tilt of each band is controlled independently via internal RET actuators compliant to AISG1.1, AISG2.0 and 3GPP protocols. In addition to independent tilt per band the Quintel MultiServ Quadband 8 Port Antenna offers tilt per polarization for the 850MHz & 1900MHz bands. This gives a total of 6 independent tilts 1x(698-787MHz) + 2x(824-894MHz) + 2x(1850-1990MHz) + 1x(1710/1755,2110/2170MHz).

Features

- Operates over the 700, 850, 1900 & AWS bands, all in one antenna.
- Has variable electrical tilt per frequency band.
- Enables independent technology performance optimisation per band.
- Upgradable to support SVP or Spatial diversity on 850/1900 bands with two antennas per sector.
- AISG & 3GPP compliant internal remote electrical tilt (RET).
- Dual RET inputs configurable for AISG 1.1/2.0 and 3GPP software via upload.
- Provides 8 antenna Ports in a slim-line (12" wide) form factor.
- Allows a simple antenna swap out and upgrade to high order MIMO.

Quick Facts:

Product #:	QS8658-1
Polarisation:	XX
Services:	4
Height:	94.6"
Beam Width:	65°

Electrical Characteristics	700MHz	850MHz
Operating Frequency	698MHz to 787MHz	824MHz to 894MHz
Azimuth 3dB beamwidth ¹	67.4°	64°
Elevation beamwidth ¹	10.2°	9.1°
Gain ¹	15.0dBi	15.5dBi
Polarization	±45°	±45°
Electrical down-tilt range	2° – 10°	2° -10°
Upper sidelobes (Within 20° above mainbeam) ¹	-17dB	-16.5dB
Front to Back Ratio (Co Polar within 20° cone)	≥22dB	≥25dB
Interband isolation ¹	≥30dB	≥30dB
Intra band isolation	≥30dB	≥30dB
Return loss (VSWR)	14dB (1.5:1)	14dB (1.5:1)
Squint ¹	>±3deg	>±3deg
Tracking ¹	>±3dB	>±2dB
Cross Pole discrimination (at 0°)	>15dB	>15dB
Power handling (per port)	500 watts	500 watts
Passive intermodulation	150dBc (2x 43dBm)	150dBc (2x 43dBm)

Electrical Characteristics	1900MHz	AWS
Operating Frequency	1850MHz to 1990MHz	1710-1755/2110-2170MHz
Azimuth 3dB beamwidth ¹	60.7°	57-67°
Elevation beamwidth ¹	5.75°	6.3°
Gain ¹	16.5dBi	16.5dBi
Polarization	±45°	±45°
Electrical down-tilt range	2° -7°	2° -7°
Upper sidelobe (Within 20° above mainbeam) ¹	-18dB	-16dB
Front to Back Ratio (Co Polar within 20° cone)	≥25dB	≥25dB
Inter band isolation ¹	≥30dB	≥30dB
Intra band isolation	≥30dB	≥30dB
Return loss (VSWR)	14dB (1.5:1)	14dB (1.5:1)
Power handling (per port)	300 watts	300 watts
Squint ¹	>±3deg	>±3deg
Tracking ¹	>±3dB	>±3dB
Cross Pole discrimination (at 0°)	>19dB	>15dB
Passive intermodulation	150dBc (2x 43dBm)	150dBc (2x 43dBm)

¹ Typical Performance across frequency and downtilt.




Fully Integrated RET Characteristics

AISG Standards	V1.1, V 2.0 and 3GPP
AISG Data rate	9.6 kbs
No of RETs	6 (4 internal, 2 external)
Connector type	IEC 60130-9 (Ed 3.0)
MTBF	36,000 Operational moves
Type approvals	FCC Part 15, EN 60950-1 (v2001), EN61000-4-5 (Lightning protection)

Mechanical Characteristics

Width	12.4 inches
Depth	9.1 inches
Height	94.6 inches
Weight excl mounting brackets	115lbs (52.1 kg)
No. of connectors	8 (2 per operating band)
Connector type	7/16 DIN female Long neck
Max Operational wind speed	150mph (67m/s)
Wind load @ Operational wind	
Frontal	2068N (465lbs)
Side	1112N (250lbs)
Operating temperature	-40°C to +65°C

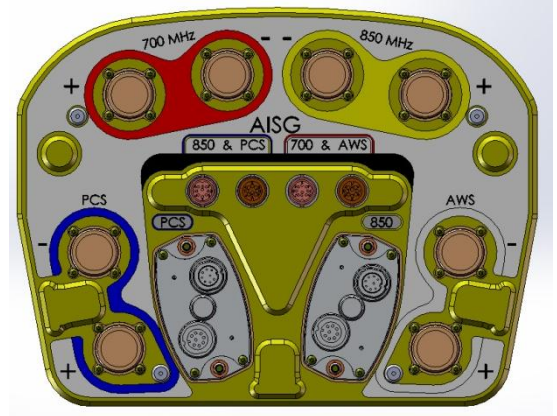

All specifications are subject to change without notice. Please contact your Quintel representative for complete details.

About Quintel

Quintel is a leading innovator in the design, development, and delivery of network-efficient antenna solutions for wireless operators worldwide. The company's products enable global wireless operators to independently deploy and optimize multiple air interfaces or services on a single standard antenna platform. Quintel is the only antenna maker whose products can increase a wireless network's capacity and provide additional services, without increasing the number or size of antennas. Our core technologies originated in the United Kingdom's Ministry of Defence, and is now deployed throughout the world. Quintel is headquartered in Rochester, New York with engineering and sales offices in Mountain View, California, and Bicester, UK with additional offices throughout North America, Europe and Asia. More information about Quintel is available at www.quintelsolutions.com.

Americas

T: +1 (650) 353-4240
F: +1 (650) 472-9186
info@quintelsolutions.com

EMEA

T: +44 (0) 1869 362 960
F: +44 (0) 1869 248 205
info@quintelsolutions.com

India Regional Office

T: +91 22 40907040
F: +91 22 40907070
info@quintelsolutions.com

Technical Support (Americas)

T: +1 (602) 692-8600
support@quintelsolutions.com

Technical Support (EMEA)

T: +44 (0) 1869 362 960
support@quintelsolutions.com

Technical Support (India)

T: +91 (0) 22 4090 7040
support@quintelsolutions.com

www.quintelsolutions.com

For general company information, please email: info@quintelsolutions.com

Member



THIS DOCUMENT PROVIDES A GENERAL DESCRIPTION OF THE PRODUCT AND SHALL NOT FORM PART OF ANY CONTRACT.

© 2012 Quintel Technology Limited. All rights reserved. Quintel and the Quintel logo are registered trademarks Quintel Technology Limited. The AISG logo is a trademark of AISG Limited. All other trademarks are the property of their respective owners.